

## RS 1000÷1200/M C01 SERIES


The well-known RS 300-800/M Burner Series, till now available up to 8 MW, has been upgraded with two new powerful burner models, the RS 1000-1200/M models that extend his max output up to 12 MW and make the Burner Series even more complete and suitable for matching with the various Heat and Steam Generators in today's market. The New Burner Models take the reliability of combustion and the solidity typical of Riello's Burners and match them with the most advanced solutions on Power Output Control and Ventilation Technology; as result a 12 MW output is supplied with a User Friendly monoblock machine assuring easiness of installation and servicing, and safe operation. An easy access to internal components is ensured by the burner opening hinge.


The New Gas Models are available with Modulating operation managed through Mechanical Cam, for a simple commissioning and to supply with precision the demanded power, guaranteeing high efficiency and setting stability, obtaining fuel consumption and operating costs reduction.



RS 1000/M C01	1100/4000 ÷ 10100 kW
RS 1200/M C01	1500/5500 ÷ 11100 kW

### FIRING RATES

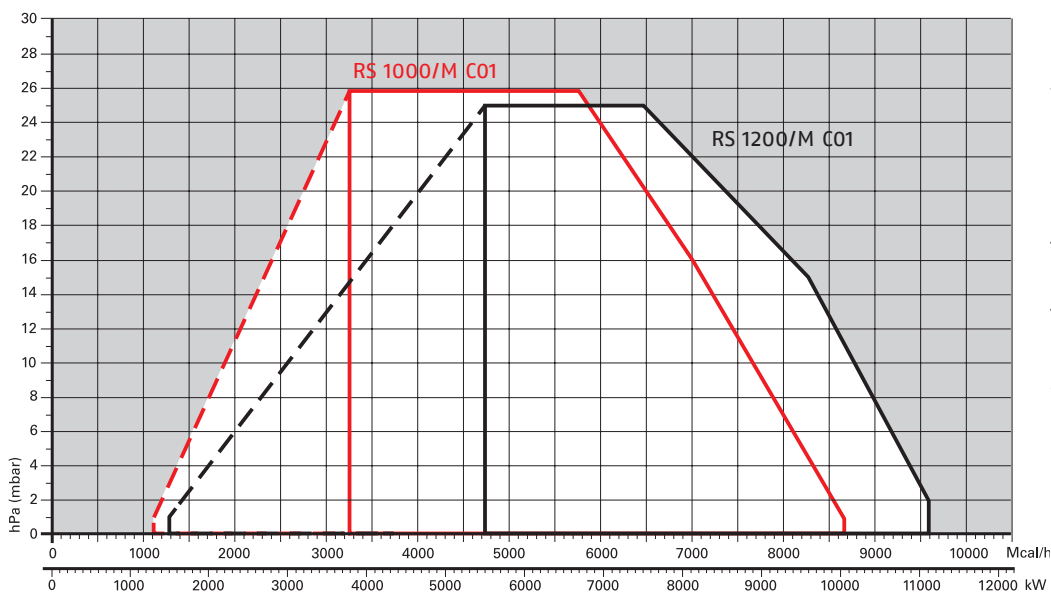

 Useful working field for choosing the burner

 Modulation range


Test conditions conforming to EN676  
 Temperature: 20°C  
 Pressure: 1013,5 mbar  
 Altitude: 0 m a.s.l.

# Modulating Gas Burners

## RS 1000-1200/M C01 SERIES

### Overall dimensions (mm)


#### BURNER

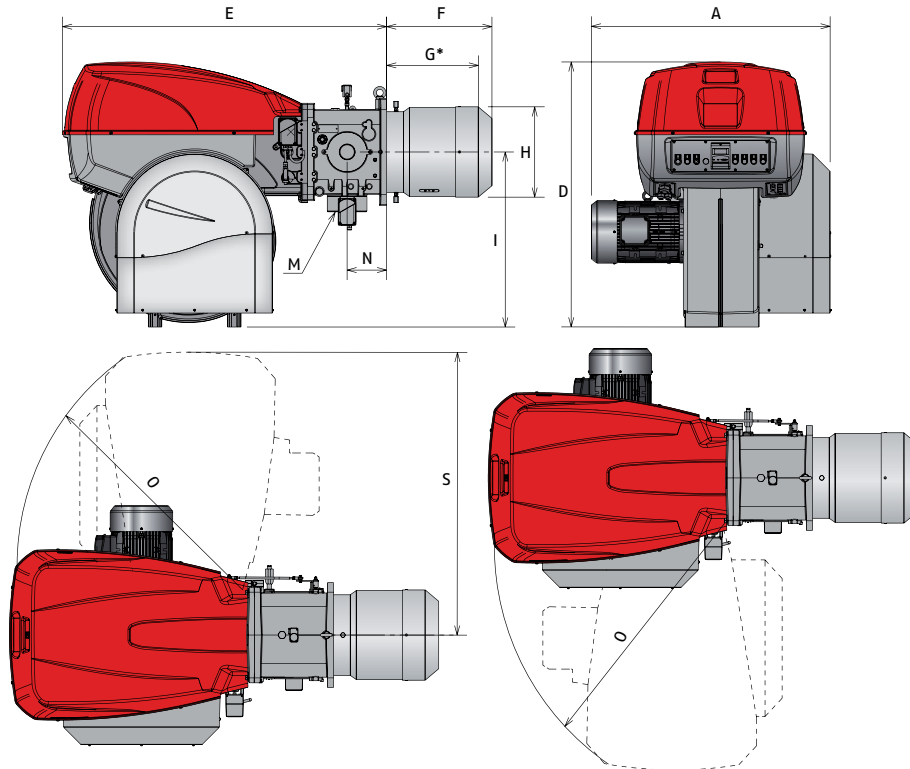

MODEL	A	D	E	F	G*	H	I	M	N	O	S
▶ RS 1000/M C01	1206	1338	1637	538	485	413	885	DN80	200	1350	1493
▶ RS 1200/M C01	1250	1338	1637	539	485	456	885	DN80	200	1350	1493


\* Maximum depth of the boiler door including the depth of the burner flange insulating gasket.

#### BURNER - BOILER MOUNTING FLANGE

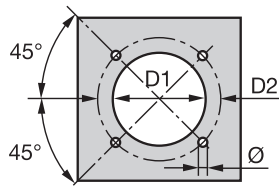

MODEL	D1	D2	Ø
▶ RS 1000/M C01	460	608	M20
▶ RS 1200/M C01	500	608	M20

#### PACKAGING

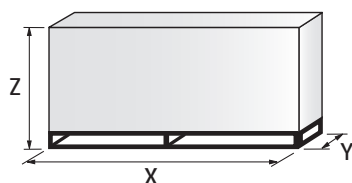

MODEL	X	Y	Z	kg
▶ RS 1000/M C01	2400	1400	1595	500
▶ RS 1200/M C01	2400	1400	1595	550

# Modulating Gas Burners

## RS 1000÷1200/M C01 SERIES

**RIELLO**

# Specification

## DESIGNATION OF SERIES

Series: R										
Fuel:		S	Natural Gas							
		L	Light oil							
		LS	Light oil/Natural Gas							
		N	Heavy oil							
Size										
Setting :		/1	Single stage							
		/B	Two stage							
		/M	Modulating - Mechanical cam							
		/P	Proportioning air/gas valve							
		/E	Electronic cam							
		/EV	Electronic cam predisposed for variable speed (with inverter)							
Emission :		C01 o ...	Class 1 EN267 - EN676							
		MZ	Class 2 EN267 - EN676							
		BLU	Class 3 EN267 - EN676							
		MX	Class 2 EN267 Class 3 EN676							
Head length:		TC	standard head							
		TL	extended head							
Flame control system:		FS1	Standard (1 stop every 24 h)							
		FS2	Continuous working (1 stop every 72 h)							
Electrical supply to the system:		1/230/50	1/230V/50Hz							
		3/230/50	3/230V/50Hz							
		3/400/50	3N/400V/50Hz							
		3/230-400/50	3/230V/50Hz - 3N/400V/50Hz							
		3/220/60	3/220V/60Hz							
		3/380/60	3N/380V/60Hz							
		3/220-380/60	3/220/60Hz - 3N/380V/60Hz							
Auxiliary voltage:		230/50-60	230V/50-60Hz							
		110/50-60	110V/50-60Hz							
R	S	1000	/M	C01	TC	FS1	3/230-400/50	230/50-60		
BASIC DESIGNATION										
EXTENDED DESIGNATION										

GAS

### Specification

#### STATE OF SUPPLY

Monoblock forced draught gas burner with modulating operation, fully automatic, made up of:

- Fan with reverse curve blades high performance
- Air suction circuit lined with sound-proofing material
- Air damper for air setting controlled by a high precision servomotor
- Air pressure switch
- Fan starting motor at 2900 rpm, three-phase 230/400 - 400/690 V with neutral, 50 Hz
- Low emission combustion head, that can be set on the basis of required output, fitted with:
  - stainless steel end cone, resistant to corrosion and high temperatures
  - ignition by gas pilot with gas train
  - flame stability disk
- Maximum gas pressure switch, with pressure test point, for halting the burner in the case of over pressure on the fuel supply line
- Burner safety control box for controlling the system safety (LFL for FS1 intermittent operation - LGK16 for FS2 continuous operation)
- UV photocell for flame detection
- Star/delta starter for the fan motor
- Main electrical supply terminal board
- Burner on/off switch
- Auxiliary voltage led signal
- Manual or automatic output increase/decrease switch
- Burner working led signal
- Contacts motor and thermal relay with release button
- Motor internal thermal protection
- Motor failure led signal
- Burner failure led signal and lighted release button
- Led signal for correct rotation direction of fan motor
- Emergency button
- Coded connection plugs-sockets
- Burner opening hinge
- Lifting rings
- IP 54 electric protection level

#### Standard equipment:

- 1 flange gasket
- 8 screws for fixing the flange
- 1 thermal screen
- 4 screws for fixing the burner flange to the boiler
- DN 80 gas supply connector for gas train connection
- Instruction handbook for installation, use and maintenance
- Spare parts catalogue.

# Modulating Gas Burners

## RS 1000÷1200/M C01 SERIES

**RIELLO**

## Available models

### Burners

CODE	MODEL	HEAT OUTPUT NATURAL GAS		TOTAL ELECTRICAL POWER (kW)	CERTIFICATION	NOTE
		(kW)	(Nm <sup>3</sup> /h)			
20061873	RS 1000/M C01 TC FS1 3/400/50 230/50-60	1100/4000-10100	130/380-940	24	In progress	(1)
20061850	RS 1200/M C01 TC FS1 3/400/50 230/50-60	1500/5500-11100	150/550-1150	27.2	In progress	(1)

Natural gas, net calorific value: 10 kWh/Nm<sup>3</sup> - Density: 0,71 kg/Nm<sup>3</sup>

(1) according to 2009/142 EC - 2004/108 - 2006/95 EC - 2006/42 EC Directives

### Gas Trains

CODE	GAS TRAIN MODEL	Ø	C.T.	VPS CODE	ADAPTER CODE	
					RS 1000	RS 1200
3970221*	MBC 1200/1 - RSM 60	Rp 2"	-	3010367	20066253 / (20068058) <sup>1</sup>	
3970225**	MBC 1200/1 CT RSM 60	Rp 2"	◆	-		
3970222*	MBC 1900/1 - FSM 40	DN 65	-	3010367	20066263 / (20065924 + 20066263) <sup>1</sup>	
3970226**	MBC 1900/1 CT FSM 40	DN 65	◆	-		
3970223*	MBC 3100/1 - FSM 40	DN 80	-	3010367	20066268 / (20065937 + 20066268) <sup>1</sup>	
3970227**	MBC 3100/1 CT FSM 40	DN 80	◆	-		
3970224*	MBC 5000/1 - FSM 80	DN 100	-	3010367	20066278 / (20065960 + 20066278) <sup>1</sup>	
3970228**	MBC 5000/1 CT FSM 80	DN 100	◆	-		
20044659*	CB 525/1 - RSM 30	Rp 2"	-	3010367	20066263 / (20065924 + 20066263) <sup>1</sup>	●
20044660**	CB 525/1 CT RSM 30	Rp 2"	◆	-		
3970147*	CB 5065/1 - FSM 30	DN 65	-	3010367	20066268 / (20065937 + 20066268) <sup>1</sup>	
3970161**	CB 5065/1 CT FSM 30	DN 65	◆	-		
3970148*	CB 5080/1 - FSM 30	DN 80	-	3010367	20066278 / (20065960 + 20066278) <sup>1</sup>	
3970162**	CB 5080/1 CT FSM 30	DN 80	◆	-		
3970149*	CB 50100/1 - FSM 30	DN 100	-	3010367	20066284 / (20065968 + 20066284) <sup>1</sup>	
3970163**	CB 50100/1 CT FSM 30	DN 100	◆	-		
20015871*	CB 50125/1 - FSM 30	DN 125	-	3010367	20066284 / (20065968 + 20066284) <sup>1</sup>	
3970196**	CB 50125/1 CT FSM 30	DN 125	◆	-		

Please see designation of Gas Train Series in the page before the Catalogue index.

\* 230V/50Hz -220V/60Hz electrical supply.

\*\* 230V/50Hz electrical supply.

The valve seal control device is compulsory (conforming to EN 676) on gas trains to burners with a maximum output over 1200 kW.

To select the gas train please refer to the technical data leaflet and/or instruction manual.

C.T. Gas valve leak detection control device:

- gas train not equipped with leak detection control device; this device can be ordered separately - see VPS column - and installed later.

◆ gas train equipped with leak detection control device.

VPS Valve leak detection control device. Supplied separately from the gas train (please see Gas train accessories paragraph for both 50 Hz and 60 Hz codes).

● Not available.

1) To be used with gas train and burner opening on the left (fan motor side).

2) To be used with /M (mechanical cam) burners, gas train on the left (fan motor side) and burner opening on the right.

# Modulating Gas Burners

## RS 1000÷1200/M C01 SERIES

### Burner accessories

#### Accessories for modulating operation

##### POWER CONTROLLER



To obtain modulating operation, the RS/M C01 series of burners requires a regulator with three point outlet controls. The following table lists the accessories for modulating operation with their application range.

BURNER	TYPE	CODE
► All models	RWF 40 - Basic version with 3 position output	3010356
	RWF 40 - High version with additional modulating output and RS 485 Interface	3010357

##### PROBE



The relative temperature or pressure probes fitted to the power controller must be chosen on the basis of the application.

BURNER	TYPE	RANGE (°C) (bar)	CODE
► All models	Temperature PT 100	-100 ÷ 500°C	3010110
	Pressure 4 ÷ 20 mA	0 ÷ 2,5 bar	3010213
	Pressure 4 ÷ 20 mA	0 ÷ 16 bar	3010214
	Pressure 4 ÷ 20 mA	0 ÷ 25 bar	3090873

##### ANALOG CONTROL SIGNAL CONVERTER



BURNER	TYPE (INPUT SIGNAL)	CODE
► All models	0/2 - 10 V (impedance 200 KΩ) 0/4 - 20 mA (impedance 250 Ω)	3010390

##### POTENTIOMETER



BURNER	KIT CODE
► RS 1000-1200/M C01	In progress

#### Continuous ventilation kit




If the burner requires continuous ventilation in the stages without flame, a special kit is available as given in the following table:

BURNER	KIT CODE
► All models	20086519

## Burner accessories

### Sound proofing box

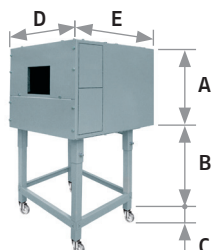

If noise emission needs reducing even further, sound-proofing boxes are available. In case of generator heights, where a lower dimension "B" is required, ask for the Box Support Kit code 20065135. The useful dimensions are 40 mm less than the total dimensions indicated in the table (A, D, E). Not suitable for outdoor use.

BURNER	BOX TYPE	A (mm)	B (mm) min-max	C (mm)	D (mm)	E (mm)	[dB(A)] (*)	BOX CODE
► RS 1000-1200/M C01	C8	1425	285 - 1000	110	1500	1800	10	3010401

(\*) Average noise reduction according to EN 15036-1 standard

## Gas train accessories

### Adapters

In certain cases, an adapter must be fitted between the gas train and the burner, when the diameter of the gas train is different from the set diameter of the burner. Below are given the available adapters; please see on the Gas Train list the correct adapter codes to select.

ADAPTER	DIMENSIONS				ADAPTER CODE
	Ø1 DN	Ø2 DN	A mm	B mm	
	2"	65 / 80	780	230	20068058
	2"	65 / 80	230	375	20066253
	65	65 / 80	230	375	20066263
	80	65 / 80	230	375	20066268
	100	65 / 80	230	375	20066278
	125	65 / 80	245	375	20066284
	65	65	800	-	20065924
	80	80	800	-	20065937
	100	100	800	-	20065960
	125	125	800	-	20065968
	125	125	800	-	20065968

# Modulating Gas Burners

## RS 1000÷1200/M C01 SERIES

### Gas train accessories

#### Stabiliser spring



To vary the pressure range of the gas train stabilisers, accessory springs are available. The following table shows these accessories with their application range. Please refer to the technical manual for the correct choice of spring.

GAS TRAIN	SPRING COLOUR	SPRING PRESSURE RANGE mbar	SPRING CODE
▶ MBC 1900/1 – 3100/1 MBC 5000/1	White	4 – 20	3010381
	Red	20 – 40	3010382
	Black	40 – 80	3010383
	Green	80 – 150	3010384
▶ CB 5065/1 – 5080/1	Red	25 – 55	3010133
	Black	60 – 110	3010135
	Pink	100 – 150	3090456
	Grey	140 – 200	3090992
▶ CB 50100/1	Red	25 – 55	3010134
	Black	60 – 110	3010136
	Pink	100 – 150	3090489
▶ CB 50125/1	Grey	140 – 200	3092174
	Red	25 – 55	3010315
	Yellow	30 – 70	3010316
	Black	60 – 110	3010317
	Pink	100 – 150	3010318

#### Seal control kit



To test the valve seals on the gas train, a special “seal control kit” is available. The valve seal control device is compulsory (EN 676) on gas trains to burners with a maximum output over 1200 kW. The seal control is type VPS 504.

GAS TRAIN	KIT CODE for 50 Hz operation	KIT CODE for 60 Hz operation
▶ MBC/1 type	3010367	20029057
▶ CB/1 type	3010367	20029057